

MODELS 106-RPS-RR / 206-RPS-RR / 306-RPS-RR

Surge Anticipating on Rate of Rise of Pressure Relief Valve


KEY FEATURES

- Protects against power failure surges or pressure waves caused by velocity changes
- Unaffected by header pressure and oversizing
- Quick opening relief
- Easily adjustable pressure setting
- No electrical services required

PRODUCT OVERVIEW


The 106-RPS-RR, 206-RPS-RR or 306-RPS-RR surge anticipating relief on rate of rise valves are based on the 106-PG, 206-PG or 306-PG main valve.

The valve is installed downstream of the pump check valve(s) and has two pilots, the 81-RP and the 81-RPD. Both pilots sense pressure through a connection to the header pipe. The 81-RP high pressure pilot acts as a standard relief pilot, opening on excessive pressure. The 81-RPD differential pilot responds to the pressure differential across its diaphragm. A pressure differential is created when there is a system pressure increase. The flow into the

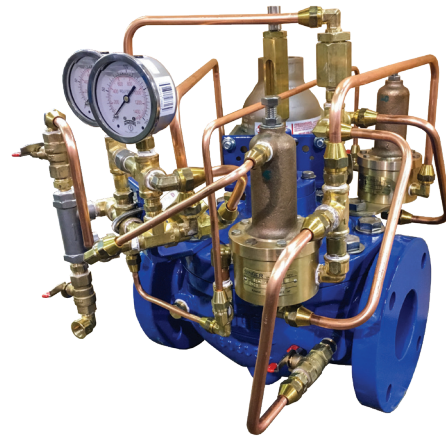

accumulator creates a pressure drop across the fixed restriction, which lowers the pressure in the connection between the fixed restriction and the pilot. The pilot senses the pressure difference between this lower pressure and the header pressure. This difference occurs at the initiation of the pressure surge, providing the time necessary for the valve to open in anticipation of the high pressure.

TYPICAL APPLICATION

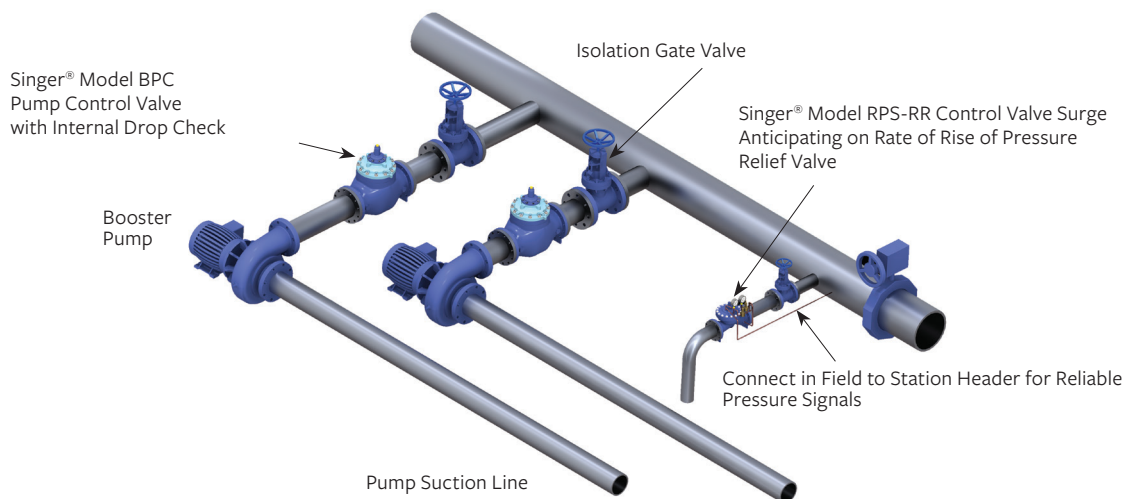


Long pipe lines and or low recovery pressure after the surge valve opens may not guarantee conventional surge valves will close. Since the RPS-RR is closing when the system pressure has stabilized, oversizing is not a problem.

MODELS 106-RPS-RR / 206-RPS-RR / 306-RPS-RR

Surge Anticipating on Rate of Rise of Pressure Relief Valve

SCHEMATIC DRAWING

NO.	PART
1	Main Valve - 106-PG, 206-PG or 306-PG, Complete with X107 Position Indicator
4	Strainer Flush Valve - Normal Position Closed
5	Flow Control - J0077A
6	Connection to Header
7	Isolating Valve - Normal Position Open
8	Strainer - 40 Mesh - J0098A
9	Pressure Gauge
10	Pressure Gauge
11	Bladder Accumulator - M1408A
12	Differential Pilot - Model 81-RPD - Normally Closed
13	Relief Pilot - Model 81-RP
14	Isolating Valve (14A, 14B) - Normal Position Open
15	Fixed Restriction - $\frac{1}{16}$ " / 1.58 mm
16	Check Valve - J0040A

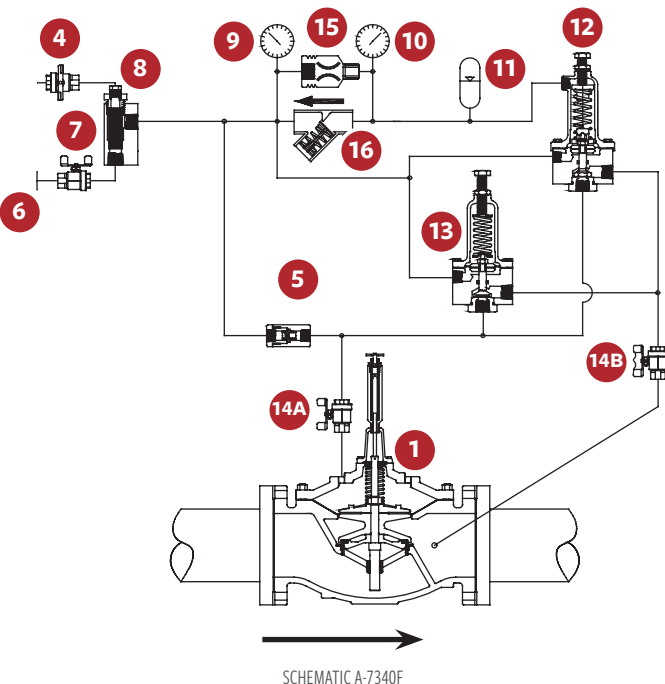

Note: Schematic shown is for 2" - 6" / 50 - 150 mm 106, and 3" - 8" / 80 - 200 mm 206. For 8" / 200 mm and higher, refer to Schematic A-7340F1

SELECTION SUMMARY

1. Anticipating surge relief valves should be sized from information provided by an engineer's surge analysis of the system.
2. In the absence of such information, as a general guide, a valve selected to pass 25% of the maximum normal flow when the valve is fully open, calculated with the static pressure as the pressure drop across the valve, has been successful in practice.
3. Ensure the maximum working pressure rating of the valve and flanges exceeds the maximum operating pressure.
4. Select either a standard globe style body or the optional angle style body.
5. Surge anticipating valves usually relieve to atmosphere which ensures high operating differential pressure and rapid response times. Momentary, "M", service range up to 45 ft/s / 14 m/s is suitable for sizing selection. Other supplementary functions are available, consult with a Singer® representative.

ORDERING INSTRUCTIONS

Refer to the order form and ordering instructions.

Additionally, include the following information for this product:

1. Single chamber (106), (206) or (306)
2. Pilot range

MODELS 106-RPS-RR / 206-RPS-RR / 306-RPS-RR

Surge Anticipating on Rate of Rise of Pressure Relief Valve

106-RPS-RR

FLOW CAPACITY 45 FT/S OR 14 M/S
(SEE 106-PG IN MAIN VALVE SECTION FOR OTHER VALVE DATA)

Size (Inches)	½"	¾"	1"	1 ¼"	1 ½"	2"	2 ½"	3"	4"
Size (mm)	15 mm	19 mm	25 mm	32 mm	40 mm	50 mm	65 mm	80 mm	100 mm
Momentary (USGPM)	-	-	-	-	-	470	670	1030	1800
Momentary (L/s)	-	-	-	-	-	30	42	65	114

106-RPS-RR

FLOW CAPACITY 45 FT/S OR 14 M/S
(SEE 106-PG IN MAIN VALVE SECTION FOR OTHER VALVE DATA)

Size (Inches)	6"	8"	10"	12"	14"	16"	20"	24"	36"
Size (mm)	150 mm	200 mm	250 mm	300 mm	350 mm	400 mm	500 mm	600 mm	900 mm
Momentary (USGPM)	4000	7000	11000	16000	19000	25000	39000	56200	124700
Momentary (L/s)	252	442	694	1009	1199	1577	2461	3546	7868

206-RPS-RR

FLOW CAPACITY 45 FT/S OR 14 M/S
(SEE 206-PG IN MAIN VALVE SECTION FOR OTHER VALVE DATA)

Size (Inches)	3"	4"	6"	8"	10"	12"	16"	18"	20"
Size (mm)	80 mm	100 mm	150 mm	200 mm	250 mm	300 mm	400 mm	450 mm	500 mm
Momentary (USGPM)	564	1236	2160	4800	8400	13200	19200	30000	30050
Momentary (L/s)	36	78	136	303	530	833	1211	1893	1896

206-RPS-RR

FLOW CAPACITY 45 FT/S OR 14 M/S
(SEE 206-PG IN MAIN VALVE SECTION FOR OTHER VALVE DATA)

Size (Inches)	24 x 16"	24 x 20"	28"	30"	32"	36"	40"	48"
Size (mm)	600 x 400 mm	600 x 500 mm	700 mm	750 mm	800 mm	900 mm	1000 mm	1200 mm
Momentary (USGPM)	30100	39000	67440	67490	67540	67640	62000	124700
Momentary (L/s)	1899	2461	4255	4258	4261	4268	3912	7868

206-RPS-RR

FLOW CAPACITY 45 FT/S OR 14 M/S
(SEE 206-PG IN MAIN VALVE SECTION FOR OTHER VALVE DATA)

Size (Inches)	24 x 16"	24 x 20"	28"	30"	32"	36"	40"	48"
Size (mm)	600 x 400 mm	600 x 500 mm	700 mm	750 mm	800 mm	900 mm	1000 mm	1200 mm
Momentary (USGPM)	30100	39000	67440	67490	67540	67640	62000	124700
Momentary (L/s)	1899	2461	4255	4258	4261	4268	3912	7868

306-RPS-RR

FLOW CAPACITY AT 14 M/S
(SEE 306-PG IN MAIN VALVE SECTION FOR OTHER VALVE DATA)

Size	DN50	DN65	DN80	DN100	DN150	DN200	DN250	DN300	DN350	DN400
Momentary (L/s)	16	30	45	78	136	306	530	833	1019	1211